

**2008 Caterpillar 988H Wheel Loader EL007**



<b>Make</b>	Caterpillar		<b>Model</b>	988H		
<b>Year</b>	2008	<b>Hours</b>	27793		As at	01/12/2019
<b>Mileage</b>				km	As at	
<b>Serial/VIN</b>	CAT0988H.BXY02343			<b>Engine Serial</b>		
<b>Details</b>	2008 Caterpillar 988H Wheel Loader / Tool Carrier Asset # EL007. Offered for sale via online auction ex Site Nifty Copper Mine via Telfer Western Australia, running to drive on to buyers transport. See Google Maps link: <a href="https://goo.gl/maps/Xvaa3uBAFso9MP7A8">https://goo.gl/maps/Xvaa3uBAFso9MP7A8</a>					
<b>Asking price</b>	AUD	Under review - call for pricing				
<b>Ex site</b>	Australia, Western Australia, Telfer					

<b>Service history</b>	
------------------------	--

**For further details, to make an offer or book an inspection, contact  
Global Equipment Solutions on Office: 08 9201 1142**





















## 5.0 SURFACE ROM EQUIPMENT

### 5.1.1 EL07 CATERPILLAR 988H LOADER

- Parked up for 8 months (excess assets)
- Sandvik lip and GET
- Transmission changed 13071 hours
- Offsite repairs 7/10/2013 at 11790 hours

Asset Number	Model	Serial Number	Current SMU reading (hrs)	All-time SMU
EL007	988H	BXY02343	27793	27793

### 5.1.2 EL07 SUMMARY

Stood back up in operation November 2019 – Front line

---



# 988H

Wheel Loader



## Engine

Engine Model	Cat® C18 ACERT®	
Gross Power	414 kW	555 hp
Net Power – ISO 14396	397 kW	540 hp
Net Power – EEC 80/1269	373 kW	501 hp

## Operating Specifications

Rated Payload	11.4 tonnes	12.5 tons
Operating Weight	50 144 kg	110,549 lb
<b>Buckets</b>		
Bucket Capacities	6.4 m <sup>3</sup> -7.7 m <sup>3</sup>	8.3 yd <sup>3</sup> -10 yd <sup>3</sup>



# 988H Wheel Loader Specifications

## Engine

Engine Model	Cat® C18 ACERT®	
Gross Power	414 kW	555 hp
Net Power – ISO 14396	397 kW	540 hp
Net Power – EEC 80/1269	373 kW	501 hp
Net Power – ISO 9249	373 kW	501 hp
Gross Power – ISO 3046-2	388 kW	520 hp
Bore	145 mm	5.7 in
Stroke	183 mm	7.2 in
Displacement	18.1 L	1,104.5 in <sup>3</sup>

- These ratings apply at 1,800 rpm when tested under the specific standard conditions for the specified standard.
- Power rating conditions based on standard air conditions of 25° C (77° F) and 99 kPa (29.32 in Hg) dry barometer, using 35° API gravity fuel having an LHV of 42 780 kJ/kg (18,390 Btu/lb) when used at 30° C (86° F) [reference a fuel density of 838.9 g/L (7.001 lb/gal)].
- Net power advertised is the power available when the engine is equipped with alternator, air cleaner, muffler and hydraulic fan drive.
- No derating required up to 3048 m (10,000 ft) altitude.
- Direct-electric, 24-volt starting system with 95 amp alternator and four high performance, maintenance-free batteries with 1,900 cold cranking amps.

## Operating Specifications

Rated Payload	11.4 tonnes	12.5 tons
Operating Weight	50 144 kg	110,549 lb

## Transmission

Converter Drive – Forward 1	6.7 km/h	4.2 mph
Converter Drive – Forward 2	11.8 km/h	7.3 mph
Converter Drive – Forward 3	20.8 km/h	12.9 mph
Converter Drive – Forward 4	36 km/h	22.3 mph
Converter Drive – Reverse 1	7.6 km/h	4.7 mph
Converter Drive – Reverse 2	13.5 km/h	8.4 mph
Converter Drive – Reverse 3	23.7 km/h	14.7 mph
Direct Drive – Forward 1	Lock-up disables	
Direct Drive – Forward 2	12.3 km/h	7.7 mph
Direct Drive – Forward 3	21.9 km/h	13.6 mph
Direct Drive – Forward 4	38.6 km/h	24 mph
Direct Drive – Reverse 1	7.9 km/h	4.9 mph
Direct Drive – Reverse 2	14.1 km/h	8.8 mph
Direct Drive – Reverse 3	25.1 km/h	15.6 mph

- Travel speeds based on two percent rolling resistance and 35/65-33 tires.

## Hydraulic Cycle Time

Raise	9.4 Seconds
Dump	2.4 Seconds
Lower Float Down (Empty)	3.8 Seconds
Total Hydraulic Cycle Time	15.6 Seconds

## Service Refill Capacities

Fuel Tank	712 L	188 gal
Cooling System	103 L	27.2 gal
Crankcase	60 L	15.9 gal
Transmission	70 L	18.5 gal
Differentials and Final Drives – Front	186 L	49 gal
Differentials and Final Drives – Rear	186 L	49 gal
Hydraulic System (factory fill)	470 L	124.2 gal
Hydraulic System (tank only)	267 L	70.5 gal

## Buckets

Bucket Capacities	6.4 m <sup>3</sup> - 7.7 m <sup>3</sup>	8.3 yd <sup>3</sup> - 10 yd <sup>3</sup>
Max. Bucket Capacity	7.7 m <sup>3</sup>	10 yd <sup>3</sup>

## Axles

Maximum Single-Wheel Rise and Fall	568 mm	22.4 in
Front	Fixed	
Rear	Oscillating ±13°	

## Brakes

Brakes	Meet SAE ISO 3450:1996
--------	---------------------------

## Cab

Cab – ROPS/FOPS	Meets SAE and ISO standards
Sound Performance	Meets ANSI, SAE and ISO standards

- Cat cab with integrated Rollover Protective Structure (ROPS) and Falling Object Protective Structure (FOPS) is standard.
- ROPS meets SAE J1040 APR99 and ISO 3471:1994 criteria.
- FOPS meets SAE J231 JAN81 and ISO 3449:1992 Level II criteria.
- The operator sound exposure Leq (equivalent sound pressure level) measured according to the work cycle procedures specified in ANSI/SAE J1166 OCT98 is 76 dB(A), for the cab offered by Caterpillar, when properly installed, maintained and tested with the doors and windows closed.
- Hearing protection may be needed when operating with an open operator station and cab (when not properly maintained or doors/windows open) for extended periods or in noisy environment.
- The exterior sound pressure level for the standard machine measured at a distance of 15 m (49.2 ft) according to the test procedures specified in SAE J88 JUN86 mid-gear-moving operation is 81 dB(A).
- The machine sound power level is 114 dB(A) measured according to the test procedures and conditions specified in ISO 6395:2008 for standard machine configuration. The measurement was conducted at 70 percent of the maximum engine cooling fan speed.
- The machine sound power level is 111 dB(A), measured according to the test procedures and conditions specified in ISO 6395:2008 for a sound suppression machine configuration. The measurement was conducted at 70 percent of the maximum engine cooling fan speed.
- The operator sound pressure level is 72 dB(A), measured according to the test procedures and conditions specified in ISO 6306:2008 for a sound suppression machine configuration. The measure was conducted at 70 percent of the maximum engine cooling fan speed.

## Steering

Steering	Meets SAE and ISO standards
----------	--------------------------------

- Total Steering Angle 86 Degrees
- Full hydraulic, load-sensing steering system meets SAE J1511 FEB94 and ISO 5010:1992 specified standards.
  - Center point frame articulation.
  - Front and rear wheels track.

## Loader Hydraulic System

Main Hydraulic System Output at 2,010 rpm and 6900 kPa (1,000 psi)	492 L/min	130 gal/min
--	-----------	-------------

Relief Valve Setting	35 000 kPa	5,075 psi
----------------------	------------	-----------

Cylinders, Double Acting: Lift, Bore and Stroke	220 × 911 mm	8.7 × 35.9 in
---	-----------------	------------------

Cylinder, Double Acting: Tilt, Bore and Stroke	220 × 1770 mm	8.7 × 69.7 in
--	------------------	------------------

Pilot System, Gear-Type Pump Output at 2,010 rpm and 2500 kPa (363 psi)	76 L/min	20.1 gal/min
---	----------	--------------

Relief Valve Setting (low idle)	2400 kPa	348.1 psi
---------------------------------	----------	-----------

- With SAE 10W oil at 66° C (150° F).



# 988H Wheel Loader Specifications

## Operation/Bucket Specifications

	988H – 3.88 m Tires: 35/65 R33 XLDD1 SLR: 955 mm			
Bucket Type	General Purpose	General Purpose	Rock	
Ground Engaging Tools	BOCE	BOCE	Teeth & Segments	
Cutting Edge Type	Straight	Straight	Spade	
Bucket Part No. (Group Level)	333-0931	333-0921	329-1611	
Struck Capacity – ISO	m <sup>3</sup> (yd <sup>3</sup> )	5.6 (7.3)	6.3 (8.2)	6.4 (8.4)
Heaped Capacity – ISO	m <sup>3</sup> (yd <sup>3</sup> )	6.9 (9.0)	7.6 (10.0)	7.7 (10.0)
Overall Height	mm (ft/in)	7634 (25'1")	7738 (25'5")	7707 (25'3")
Dump Clearance at 45° Dump				
Bare	mm (ft/in)	3730 (12'3")	3646 (12'0")	3429 (11'3")
Teeth	mm (ft/in)	—	—	3236 (10'7")
Reach at 45° Dump				
Bare	mm (ft/in)	1754 (5'9")	1832 (6'0")	2047 (6'9")
Teeth	mm (ft/in)	—	—	2231 (7'4")
Reach with Level Boom Level Bucket				
Bare	mm (ft/in)	3806 (12'6")	3920 (12'10")	4226 (13'10")
Teeth	mm (ft/in)	—	—	4492 (14'9")
Digging Depth	mm (in)	227 (9")	232 (9")	232 (9")
Overall Length – Bucket Level Ground (Teeth)	mm (ft/in)	11 830 (38'10")	11 947 (39'2")	12 520 (41'1")
Turning Radius – Corner SAE Carry (Teeth)	mm (ft/in)	8680 (28'6")	8712 (28'7")	8791 (28'10")
Reach at 45° Dump and 2.13 m (7 ft 0 in) Height				
Bare	mm (ft/in)	2745 (9'0")	2794 (9'2")	3180 (10'5")
Teeth	mm (ft/in)	—	—	3340 (10'11")
Full Dump at Maximum Lift	degrees	-51.4	-51.4	-51.4
Tipping Load* at Operating Weight				
Straight	kg (lb)	33 040 (72,841)	32 692 (72,073)	31 860 (70,240)
Articulated 35°	kg (lb)	28 362 (62,528)	28 015 (61,762)	27 206 (59,978)
Articulated 43°	kg (lb)	26 279 (57,935)	25 931 (57,168)	25 132 (55,406)
Tipping Load** at Operating Weight				
Straight	kg (lb)	34 724 (76,553)	34 390 (75,817)	33 539 (73,941)
Articulated 43°	kg (lb)	29 277 (64,545)	28 954 (63,833)	28 127 (62,009)
Articulated 35°	kg (lb)	31 057 (68,469)	30 731 (67,750)	29 895 (65,907)
Breakout Force – SAE Rated	kg (lb)	49 062 (108,164)	45 977 (101,361)	39 289 (86,617)
Operating Weight	kg (lb)	49 598 (109,346)	49 835 (109,868)	50 360 (111,025)
Weight Distribution at SAE Carry				
Front	kg (lb)	25 326 (55,834)	25 746 (56,761)	26 752 (58,979)
Rear	kg (lb)	24 272 (53,511)	24 089 (53,107)	23 608 (52,047)

**Note:** Tire spec used for Tipping Load specifications includes 35/65R33 (L-4) Michelin XLDD1 tires.

\*Tipping Loads were calculated within the guidelines of ISO 14397-1:2007 to include tire squash (Tire pressure at 634 kPa [92 psi]).

\*\*Tipping Load is calculated without tire squash.

## Operation/Bucket Specifications

		988H – 3.88 m Tires: 35/65 R33 XLDD1 SLR: 955 mm		
Bucket Type		Rock	Rock	Rock
Ground Engaging Tools		Teeth & Segments	Teeth & Segments	Teeth & Segments
Cutting Edge Type		Spade	Spade	Spade
Bucket Part No. (Group Level)		333-0891	333-0911	333-0950
Struck Capacity – ISO	m <sup>3</sup> (yd <sup>3</sup> )	5.6 (7.3)	5.1 (6.7)	5.1 (6.7)
Heaped Capacity – ISO	m <sup>3</sup> (yd <sup>3</sup> )	6.9 (9.0)	6.4 (8.3)	6.4 (8.3)
Overall Height	mm (ft/in)	7605 (24'11")	7530 (24'8")	7530 (24'8")
Dump Clearance at 45° Dump				
Bare	mm (ft/in)	3507 (11'6")	3563 (11'8")	3513 (11'6")
Teeth	mm (ft/in)	3314 (10'10")	3371 (11'1")	3345 (11'0")
Reach at 45° Dump				
Bare	mm (ft/in)	1970 (6'6")	1913 (6'3")	1942 (6'4")
Teeth	mm (ft/in)	2153 (7'1")	2097 (6'11")	2100 (6'11")
Reach with Level Boom Level Bucket				
Bare	mm (ft/in)	4116 (13'6")	4036 (13'3")	4092 (13'5")
Teeth	mm (ft/in)	4382 (14'5")	4302 (14'1")	4323 (14'2")
Digging Depth	mm (in)	232 (9")	232 (9")	247 (10")
Overall Length – Bucket Level Ground (Teeth)	mm (ft/in)	12 410 (40'9")	12 330 (40'5")	12 361 (40'7")
Turning Radius – Corner SAE Carry (Teeth)	mm (ft/in)	8762 (28'9")	8740 (28'8")	8753 (28'9")
Reach at 45° Dump and 2.13 m (7 ft 0 in) Height				
Bare	mm (ft/in)	2800 (9'2")	2769 (9'1")	2787 (9'2")
Teeth	mm (ft/in)	2984 (9'9")	2953 (9'8")	2945 (9'8")
Full Dump at Maximum Lift	degrees	-51.4	-51.4	-51.4
Tipping Load* at Operating Weight				
Straight	kg (lb)	32 195 (70,978)	32 435 (71,508)	31 338 (69,089)
Articulated 35°	kg (lb)	27 539 (60,713)	27 779 (61,242)	26 683 (58,826)
Articulated 43°	kg (lb)	25 465 (56,140)	25 705 (56,669)	24 609 (54,254)
Tipping Load** at Operating Weight				
Straight	kg (lb)	33 861 (74,651)	34 088 (75,151)	32 984 (72,717)
Articulated 43°	kg (lb)	28 437 (62,693)	28 658 (63,180)	27 550 (60,737)
Articulated 35°	kg (lb)	30 210 (66,602)	30 432 (67,091)	29 326 (64,653)
Breakout Force – SAE Rated	kg (lb)	41 531 (91,560)	43 299 (95,459)	41 607 (91,728)
Operating Weight	kg (lb)	50 144 (110,549)	49 986 (110,201)	51 093 (112,641)
Weight Distribution at SAE Carry				
Front	kg (lb)	26 362 (58,117)	26 076 (57,489)	28 005 (61,741)
Rear	kg (lb)	23 783 (52,432)	23 910 (52,712)	23 088 (50,901)

**Note:** Tire spec used for Tipping Load specifications includes 35/65R33 (L-4) Michelin XLDD1 tires.

\*Tipping Loads were calculated within the guidelines of ISO 14397-1:2007 to include tire squash (Tire pressure at 634 kPa [92 psi]).

\*\*Tipping Load is calculated without tire squash.



# 988H Wheel Loader Specifications

## Operation/Bucket Specifications

		988H – 4.25 m Tires: 35/65 R33 XLDD1 SLR: 955 mm		
<b>Bucket Type</b>		<b>General Purpose</b>	<b>General Purpose</b>	<b>Rock</b>
<b>Ground Engaging Tools</b>		<b>BOCE</b>	<b>BOCE</b>	<b>Teeth &amp; Segments</b>
<b>Cutting Edge Type</b>		<b>Straight</b>	<b>Straight</b>	<b>Spade</b>
<b>Bucket Part No. (Group Level)</b>		<b>333-0931</b>	<b>333-0921</b>	<b>329-1611</b>
Struck Capacity – ISO	m <sup>3</sup> (yd <sup>3</sup> )	5.6 (7.3)	6.3 (8.2)	6.4 (8.4)
Heaped Capacity – ISO	m <sup>3</sup> (yd <sup>3</sup> )	6.9 (9.0)	7.6 (10.0)	7.7 (10.0)
Overall Height	mm (ft/in)	8048 (26'5")	8152 (26'9")	8121 (26'8")
Clearance at 45° Dump				
Edge	mm (ft/in)	4143 (13'7")	4059 (13'4")	3842 (12'7")
Tooth Tip	mm (ft/in)	—	—	3650 (12'0")
Reach at 45° Dump				
Edge	mm (ft/in)	1852 (6'1")	1929 (6'4")	2145 (7'0")
Tooth Tip	mm (ft/in)	—	—	2329 (7'8")
Reach with level boom level bucket				
Edge	mm (ft/in)	4176 (13'8")	4290 (14'1")	4596 (15'1")
Tooth	mm (ft/in)	—	—	4862 (15'11")
Digging Depth	mm (in)	258 (10")	263 (10")	264 (10")
Overall Length – Bucket Level Ground (Tooth)	mm (ft/in)	12 270 (40'3")	12 387 (40'8")	12 960 (42'6")
Turning Radius – Corner SAE Carry (Tooth)	mm (ft/in)	8870 (29'1")	8904 (29'3")	8983 (29'6")
Clearance at 45° Dump and 2.13 m (7 ft 0 in) Height				
Edge	mm (ft/in)	2130 (7'0")	2130 (7'0")	2323 (7'7")
Tooth	mm (ft/in)	—	—	2130 (7'0")
Reach at 45° Dump and 2.13 m (7 ft 0 in) Height				
Edge	mm (ft/in)	3132 (10'3")	3184 (10'5")	3248 (10'8")
Tooth	mm (ft/in)	—	—	3432 (11'3")
Full Dump at Maximum Lift	degrees	-48.5	-48.5	-48.5
Tipping Load* at Operating Weight				
Straight	kg (lb)	30 879 (68,076)	30 558 (67,368)	29 764 (65,619)
Articulated 35°	kg (lb)	26 422 (58,251)	26 099 (57,539)	25 325 (55,831)
Articulated 43°	kg (lb)	24 432 (53,864)	24 110 (53,153)	23 344 (51,465)
Tipping Load** at Operating Weight				
Straight	kg (lb)	32 262 (71,126)	31 951 (70,440)	31 143 (68,659)
Articulated 43°	kg (lb)	27 031 (59,593)	26 728 (58,925)	25 941 (57,190)
Articulated 35°	kg (lb)	28 741 (63,363)	28 435 (62,688)	27 641 (60,938)
Breakout Force – SAE Rated	kg (lb)	52 971 (116,780)	49 652 (109,465)	42 469 (93,628)
Operating Weight	kg (lb)	50 626 (111,612)	50 863 (112,134)	51 388 (113,292)
Weight Distribution at SAE Carry				
Front	kg (lb)	25 652 (56,552)	26 093 (57,524)	27 145 (59,844)
Rear	kg (lb)	24 975 (55,060)	24 771 (54,610)	24 243 (53,447)

**Note:** Tire spec used for Tipping Load specifications includes 35/65R33 (L-4) Michelin XLDD1 tires.

\*Tipping Loads were calculated within the guidelines of ISO 14397-1:2007 to include tire squash (Tire pressure at 634 kPa [92 psi]).

\*\*Tipping Load is calculated without tire squash.

## Operation/Bucket Specifications

		988H – 4.25 m Tires: 35/65 R33 XLDD1 SLR: 955 mm		
Bucket Type		Rock	Rock	Rock
Ground Engaging Tools		Teeth & Segments	Teeth & Segments	Teeth & Segments
Cutting Edge Type		Spade	Spade	Spade
Bucket Part No. (Group Level)		333-0891	333-0911	333-0950
Struck Capacity – ISO	m <sup>3</sup> (yd <sup>3</sup> )	5.6 (7.3)	5.1 (6.7)	5.1 (6.7)
Heaped Capacity – ISO	m <sup>3</sup> (yd <sup>3</sup> )	6.9 (9.0)	6.4 (8.3)	6.4 (8.3)
Overall Height	mm (ft/in)	8018 (26'4")	7943 (26'1")	7944 (26'1")
Clearance at 45° Dump				
Edge	mm (ft/in)	3920 (12'10")	3977 (13'1")	3926 (12'11")
Tooth Tip	mm (ft/in)	3728 (12'3")	3784 (12'5")	3758 (12'4")
Reach at 45° Dump				
Edge	mm (ft/in)	2067 (6'9")	2011 (6'7")	2040 (6'8")
Tooth Tip	mm (ft/in)	2251 (7'5")	2194 (7'2")	2198 (7'3")
Reach with level boom level bucket				
Edge	mm (ft/in)	4486 (14'9")	4406 (14'5")	4462 (14'8")
Tooth	mm (ft/in)	4752 (15'7")	4672 (15'4")	4693 (15'5")
Digging Depth	mm (in)	264 (10")	264 (10")	279 (11")
Overall Length – Bucket Level Ground (Tooth)	mm (ft/in)	12 850 (42'2")	12 770 (41'11")	12 800 (42'0")
Turning Radius – Corner SAE Carry (Tooth)	mm (ft/in)	8953 (29'4")	8931 (29'4")	8945 (29'4")
Clearance at 45° Dump and 2.13 m (7 ft 0 in) Height				
Edge	mm (ft/in)	2323 (7'7")	2323 (7'7")	2298 (7'6")
Tooth	mm (ft/in)	2130 (7'0")	2130 (7'0")	2130 (7'0")
Reach at 45° Dump and 2.13 m (7 ft 0 in) Height				
Edge	mm (ft/in)	3203 (10'6")	3169 (10'5")	3188 (10'5")
Tooth	mm (ft/in)	3387 (11'1")	3353 (11'0")	3346 (11'0")
Full Dump at Maximum Lift	degrees	-48.5	-48.5	-48.5
Tipping Load* at Operating Weight				
Straight	kg (lb)	30 071 (66,296)	30 292 (66,783)	29 202 (64,380)
Articulated 35°	kg (lb)	25 633 (56,512)	25 855 (56,999)	24 765 (54,598)
Articulated 43°	kg (lb)	23 651 (52,142)	23 873 (52,631)	22 785 (50,231)
Tipping Load** at Operating Weight				
Straight	kg (lb)	31 441 (69,316)	31 654 (69,785)	30 559 (67,371)
Articulated 43°	kg (lb)	26 230 (57,827)	26 438 (58,286)	25 339 (55,863)
Articulated 35°	kg (lb)	27 933 (61,582)	28 143 (62,045)	27 045 (59,624)
Breakout Force – SAE Rated	kg (lb)	44 873 (98,928)	46 770 (103,110)	44 969 (99,139)
Operating Weight	kg (lb)	51 172 (112,815)	51 014 (112,467)	52 121 (114,908)
Weight Distribution at SAE Carry				
Front	kg (lb)	26 736 (58,943)	26 438 (58,286)	28 473 (62,772)
Rear	kg (lb)	24 436 (53,872)	24 576 (54,181)	23 648 (52,135)

**Note:** Tire spec used for Tipping Load specifications includes 35/65R33 (L-4) Michelin XLDD1 tires.

\*Tipping Loads were calculated within the guidelines of ISO 14397-1:2007 to include tire squash (Tire pressure at 634 kPa [92 psi]).

\*\*Tipping Load is calculated without tire squash.




# 988H Wheel Loader Specifications

## Tire Dimensions/Specifications

	Width over Tires		Ground Clearance		Change in Vertical Dimensions		Change in Full Turn Static Tipping Load	
	mm	inches	mm	inches	mm	inches	kg	lb
35/65R33 (L-4) Michelin XLDD1	3598	140.1	526	20.7	0	0	0	0
35/65-33 42 PR (L-5) Bridgestone D-Lug	3541	139.4	565	22.2	39	1.5	1855	4,090
35/65R33 (L-4) Bridgestone V-Steel N Traction VSNT	3569	140.5	541	21.3	15	0.6	287	633
35/65R33 (L-5) Bridgestone V-Steel D-Lug VSDL	3540	139.4	541	21.3	15	0.6	911	2,008
35/65-33 42PR (L-5) Goodyear NRL D/L 5A	3487	137.3	553	21.8	27	1.1	2144	4,727
875/65R33 (L-5) RL-5K	3536	139.2	543	21.4	17	0.7	1036	2,284
35/65R33 (L-5) Michelin XLDD2	3549	139.7	536	21.1	10	0.4	242	534

## Dimensions

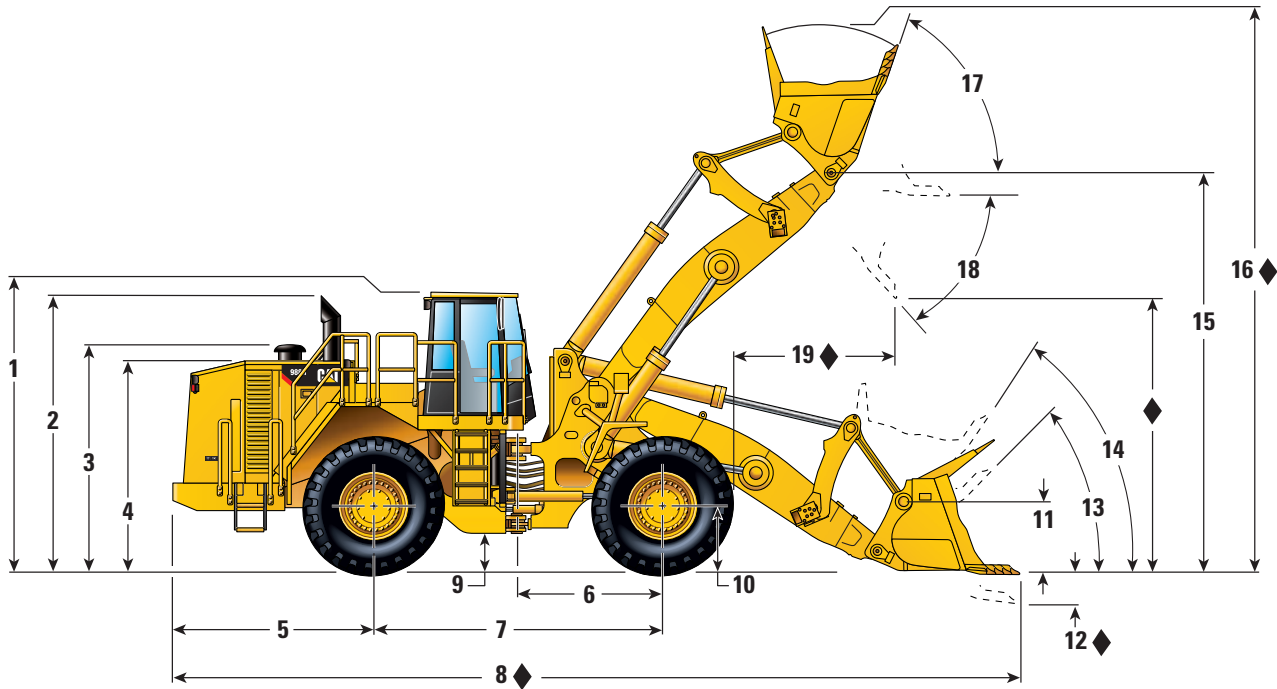

4.25 Meter Linkage

◆ Dimensions vary with bucket. Refer to Operation/Bucket Specifications.

1	Height to Top of Cab	4105 mm	13.47 ft
2	Height to Top of Exhaust Stacks	4089 mm	13.42 ft
3	Height to Top of Air Cleaner	3359 mm	11.02 ft
4	Height to Top of Hood	3133 mm	10.28 ft
5	Center Line of Rear Axle to Edge of Rear Bumper	3132 mm	10.28 ft
6	Center Line of Front Axle to Hitch	2275 mm	7.46 ft
7	Wheel Base Length	4550 mm	14.93 ft
8	Length with Bucket on Ground	◆	◆
9	Ground Clearance	526 mm	1.73 ft
10	Height to Center of Wheel	955 mm	3.13 ft
11	C-Pin Height**	1157 mm	3.8 ft
12	Dig Depth	264 mm 232 mm*	10 in 9 in*
13	Rack Back Angle at Ground		47.8° 45.7°*
14	Rack Back Angle at Carry		58.7° 54.5°*
15	B-Pin Height	5830 mm 5417 mm*	19.13 ft 17.77 ft*
16	Overall Height with Bucket Raised	◆ ◆*	◆ ◆*
17	Rack Back Angle at Maximum Lift		73°
18	Dump Angle at Maximum Lift		48.5° 51.4°*
19	Reach	◆	◆

\*3.88 Meter Linkage

\*\*Same for both 3.88 and 4.25 Meter Linkage



# 988H Standard Equipment

Standard equipment may vary. Consult your Cat dealer for details.

## POWER TRAIN

Brakes, full hydraulic, enclosed, wet multiple disc service  
Case drain filters  
Demand fan  
Engine, Cat® C18 with ACERT® Technology  
ATTAC and ADEM™ A4 controller  
Fuel priming pump (electric)  
Guard, (3 piece) transmission  
Parking brake  
Precleaner, engine air intake  
Radiator, Next Generation Modular (NGMR)  
Separated cooling system  
Starting aid (ether), automatic  
Throttle lock  
Torque converter, impeller clutch with Rimpull Control System (switch and dial in cab)  
Transmission, planetary, auto-shift with 4F/3R speed range control

## ELECTRICAL

Alarm, back-up  
Alternator (95-amp)  
Batteries, maintenance-free (4–950 CCA)  
Deutsch terminal connectors  
Electrical system (24-volt)  
Lighting system, halogen (front and rear) lighting, access stairway  
Starter, electric (heavy duty)  
Starting receptacle for emergency start

## OPERATOR ENVIRONMENT

Air conditioner  
Cab, sound-suppressed pressurized, internal four-post Rollover Protective Structure (ROPS/FOPS)  
Radio ready for (entertainment) includes antenna, speakers and converter (12-volt, 10-15 amp)  
12-volt power port for mobile phone or laptop connection  
Cigar lighter (12-volt) and ashtray  
Coat hook  
Electro-hydraulic tilt and lift controls (floor-mounted)  
Heater and defroster  
Horn, electric  
Laminated glass  
Light, (dome) cab  
Lunchbox and beverage holders  
Monitoring system (EMS-III)  
Action alert system, three category  
Instrumentation, gauges  
Engine coolant temperature  
Fuel level  
Hydraulic oil temperature  
Speedometer/tachometer  
Transmission oil temperature  
Instrumentation, warning indicators:  
Axle/brake oil temperature (front/rear)  
Brake oil pressure  
Electrical system, low voltage  
Engine intake/combustion air temperature  
Engine oil pressure  
Engine overspeed  
Fuel pressure  
Hydraulic oil filter status  
Parking brake status  
Transmission filter status  
Mirrors, rearview (externally-mounted)  
Seat, Cat Comfort (cloth) air suspension  
Seat belt, retractable, 76 mm (3 in) wide  
STIC control system with steering lock  
Tilt and lift control system lock  
Tinted glass  
Transmission gear (indicator)  
Wet-arm wipers/washers (front and rear)  
Intermittent wipers (front and rear)

## TIRES, RIMS AND WHEELS

A tire must be selected from the Mandatory Attachment section. Base machine price includes a tire allowance.

## FLUIDS

Antifreeze, premixed 50% concentration of Extended Life Coolant with freeze protection to –34° C (–29° F)

## OTHER STANDARD EQUIPMENT

Engine idle shutdown  
Automatic bucket tilt/lift kickouts, electronically adjustable from cab  
Counterweight  
Doors, service access (locking)  
Emergency platform egress  
Engine, crankcase, 500-hour interval with C14 oil  
Extended roof  
Fuel Management System  
Ground level fuel fill  
Grouped electronic clutch pressure control and remote-mounted pressure taps  
Auto idle kickdown  
Hitch, drawbar with pin  
Hydraulic oil cooler  
Lower cab cover  
Muffler (under hood)  
Oil sampling valves  
Product Link  
Stairway, left and right rear access  
Steering, load-sensing  
Tilt regeneration  
Toe kicks  
Vandalism protection caplocks  
Venturi stack

Optional equipment may vary. Consult your Cat dealer for details.

AutoLube	Crankcase	Payload Control System (PCS)
Axle oil coolers	Steering cylinders	Product Link
Block Handler configuration (Custom)	Heater, engine coolant, 120-volt	Rear chain clearance
Buckets	Heater, engine coolant, 220-volt	Ride Control
Bulk Loader configuration (Custom)	High ambient cooling	Roading fenders, front and rear
Directional lights	Hydraulic, three-valve	Roof, extended
Engine brake	Lights, HID	Secondary steering
Extended Life Coolant -50° C (-58° F)	Linkage, 4.25 meter	Sound suppression, exterior
Forestry configuration (Custom)	Lock-up clutch	Steel Mill configuration (Custom)
Fuel, fast fill	Mid-ambient cooling	Tires
Fuel, fast fill and heater	No-SPIN differential, rear only	
Guards	Oil change, high-speed	